

United States
Department of the Interior
Geological Survey

MULTICHANNEL SEISMIC-REFLECTION DATA COLLECTED
IN 1981 ACROSS THE ALEUTIAN ARC AND TRENCH, ALASKA

by

Dave W. Scholl, Dennis M. Mann, Tracy L. Vallier and Ray W. Sliter

Open File Report
88-592

This report is preliminary and has not been reviewed for conformity with U.S. Geological Survey editorial standards and stratigraphic nomenclature.

Any use of trade names and trademarks in this publication is for descriptive purposes only and does not constitute endorsement by the U.S. Geological Survey.

Menlo Park, CA

1988

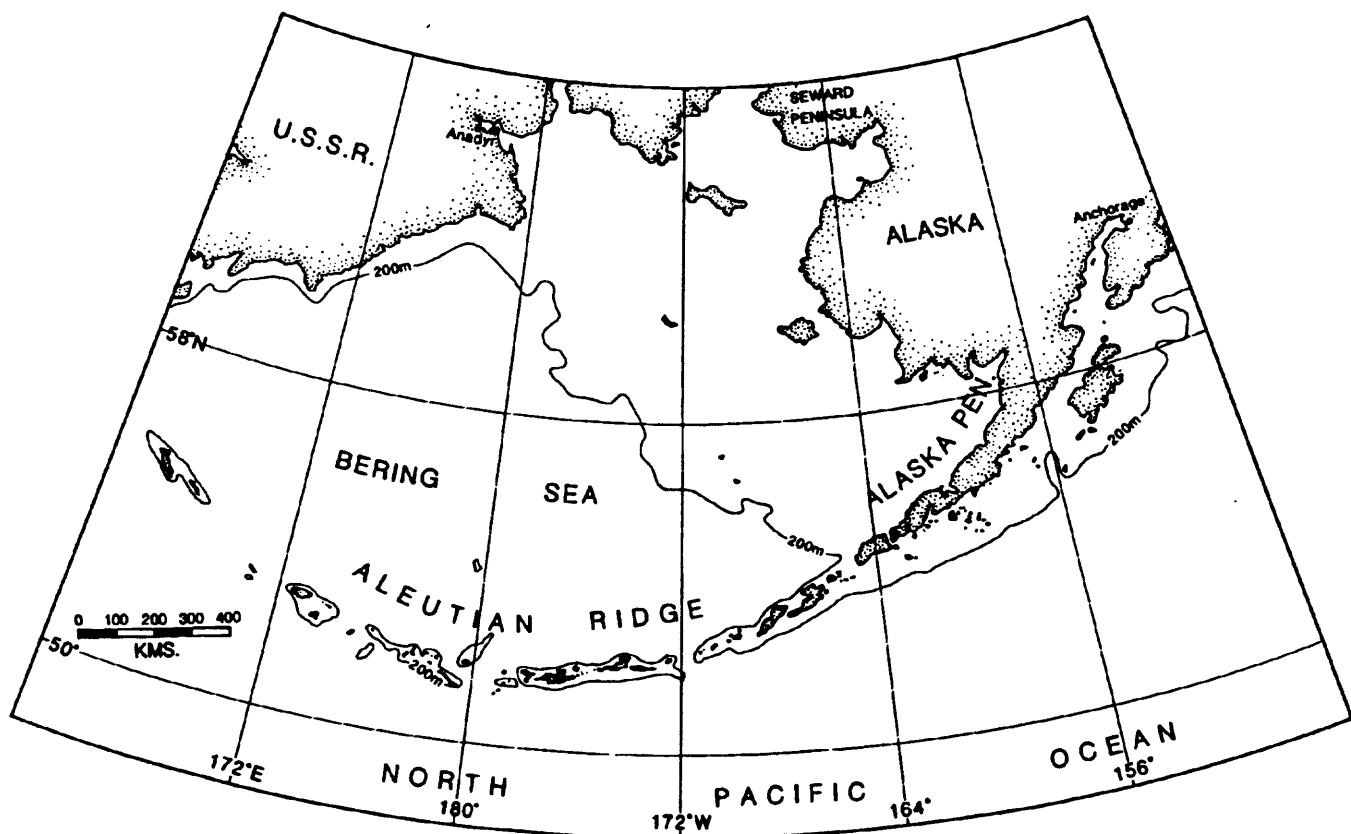


Figure 1. Area of study. Plates 1 and 2 show detailed tracklines and shotpoint locations.

RECORDING PARAMETERS

DATE RECORDED: 7/81

SOURCE: BOLT AIR GUNS
 AIR GUNS IN ARRAY: 5
 NET VOLUME: 1313 CU. IN.
 MANIFOLD PRESSURE: 2000 PSI
 GUN DEPTH: 8.5 M
 SHOT SPACING: 50 M

STREAMER: SEI MULTIDYNE, CHARGE COUPLED
 GEOMETRY:

GROUP INTERVAL: 100 M
 AVERAGE DEPTH: 12 M
 GROUP LENGTH: 100 M
 PHONES/GROUP: 60
 DEPTH CONTROLLERS: SEI VARIABLE WING BIRDS

RECORDING: GUS HDRR 4200, BINARY GAIN
 SAMPLE INTERVAL: 2 MS
 RECORD LENGTH: 11 S
 GUS RECORDING FILTER: 5-110 HZ
 NUMBER OF CHANNELS: 24

NAVIGATION: MAGNAVOX INTEGRATED SYSTEM
 SHOT ON: DISTANCE
 PRIMARY NAVIGATION: SATELLITE
 DIRECTION RECORDED: S

PROCESSING SEQUENCE

DATE PROCESSED: 2/82

1 DEMULTIPLEX: 4 MS
 DESAMPLE:
 GAIN RECOVERY:
 REFORMAT: PHOENIX I

2 TRACE SHOT EDIT:

3 STATIC CORRECTIONS: 276 MS
 RECORDING STATICS:
 DATUM: SEA LEVEL

4 CDP SORT:

5 VELOCITY ANALYSIS: 100 MS
 WINDOW LENGTH:
 WINDOW INTERVAL: 4 MS
 BAND PASS FILTER: 3-6-40-50 HZ
 VELOCITY RANGE: 1400-4000 M/S

6 NMO CORRECTION:

7 24-FOLD STACK: NORMALIZED WEIGHTING

8 BANDPASS FILTER: COSINE
 FILTER POINTS: 101
 TIME WINDOW: 0.0-10.0 S
 FREQUENCY: 4-8-50-60 HZ

9 PREDICTIVE DECONVOLUTION: 2000 MS
 DESIGN WINDOW:
 OPERATOR: 200 MS
 GAP: 32 MS

10 AGC WINDOW: 500 MS

PLOT PARAMETERS

MODE: VARIABLE AREA/WIGGLE TRACE

HORIZONTAL SCALE: 20 TRACES/IN.

VERTICAL SCALE: 1.50 IN./S

CLIP: 2.0 TRACE WIDTHS

GAIN: 1.0 (SCALAR)

ANY USE OF TRADE NAMES IS FOR PURPOSES OF IDENTIFICATION ONLY AND DOES NOT IMPLY ENDORSEMENT BY THE U. S. GEOLOGICAL SURVEY

CHIEF SCIENTISTS: D. SCHOLL, T. VALLIER PROCESSORS: D. MANN, R. SLITER

Table 1. Recording parameters, processing sequence and plot parameters for stacked multichannel seismic reflection data collected on USGS cruise L9-81-AA.

The data are available in the following formats:

- 1) Electrostatically plotted profiles which have been deconvolved and filtered after stacking. Copies of the profiles may be purchased through:

National Geophysical Data Center
NOAA/EDIS/Code D64
325 Broadway
Boulder, Colorado 80303

- 2) Digital magnetic stack tapes which have been processed using velocities derived from velocity analysis. These tapes are not deconvolved or band-pass filtered. Stack tapes are in Phoenix format; a Seismograph Service Corp., 16-bit integer trace sequential format. Copies of the stack tapes and a description of the tape format can be obtained at the requesters expense by contacting:

Dennis M. Mann
U.S. Geological Survey
345 Middlefield Rd. MS 999
Menlo Park, California 94025
Tel. (415) 354-3174

- 3) Digital magnetic demultiplexed tapes. These tapes have been edited for missed shots and muting times. Demultiplexed tapes are in PhoenixI format; a Seismograph Service Corp. modified S.E.G.-X 32-bit floating point format. Copies of the demultiplexed tapes and a description of the tape formats can be obtained at the requesters expense by contacting Dennis Mann at the above address.

- 4) A presentation of geological and geophysical results from the 1981 Aleutian Arc survey available in:

Scholl, D.W., Grantz, A., and Vedder, J.G., 1988, Geology and Resource Potential of the Continental Margin of Western North America and Adjacent Ocean Basins - Beaufort Sea to Baja California Region, Circum-Pacific Council for Energy and Mineral Resources Earth Science Series, Vol. 6: Circum-Pacific Council for Energy and Mineral Resources, Houston, Texas.

- 5) Additional copies of this report may be obtained by contacting:

Open File Service Section
U.S. Geological Survey
P.O. Box 25425
Federal Center, Bldg 810
Denver, Colorado 80225
Tel. (303) 236-7476

MULTICHANNEL SEISMIC-REFLECTION DATA COLLECTED IN 1981 ACROSS THE ALEUTIAN ARC AND TRENCH, ALASKA

by

Dave W. Scholl, Dennis M. Mann, Tracy L. Vallier and Ray W. Sliter

In late July and early August 1981, the U.S. Geological Survey (USGS) conducted a reconnaissance geophysical survey from 173 to 171 W longitude along the Aleutian Arc and Trench, near the islands of Atka, Amlia, Kiska, and Agattu. Approximately 2100 km of 24-channel seismic-reflection data were recorded: eight lines of data perpendicular and seven subparallel to the trench-arc system. The profiles were collected on the USGS Research Vessel S.P. Lee, (USGS survey identifier L9-AA-81).

Seismic energy was provided by a tuned array of five airguns with a total volume of 1301 cubic inches of air compressed to approximately 1900 psi. The recording system consisted of a 24-channel, 2400 meter long streamer with a group interval of 100 m, and a GUS (Global Universal Science) model 4200 digital recording instrument. A shooting geometry of 50-m shotpoint intervals with 100-m group intervals resulted in 24-fold data collection. Navigational control for the survey was provided by a Magnavox integrated navigation system using transit satellites and doppler-sonar. A 2-millisecond sampling rate was used in the field; the data were later desampled to 4-milliseconds during the demultiplexing process. Record length of 8 to 12 seconds was used which, combined with a deep water delay, yielded up to 16 seconds of two way travel time. Processing was done at the USGS processing center in Menlo Park, California, in the sequence editing-demultiplexing, velocity analysis, CDP stacking, deconvolution-filtering, and plotting on an electrostatic plotter. Sheets 1 and 2 are trackline charts showing shotpoint navigation.